

HWT-C2150-10-LI-PV(3.6mm)

1T 5MP Double Light Full-Color Alert AI Bullet Camera



Features

- ▶ 1TOPS computing power
 - ▶ Supports behavior analysis, crowd flow analysis, and target and person detection
 - ▶ Supports backlight adaptation and overcast adaptation
 - ▶ 1/2.7" CMOS sensor
 - ▶ 120 dB super wide dynamic range (WDR), ensuring that both foreground and background objects are clearly identified in environments with sharp light contrast
 - ▶ Various light compensation modes, such as starlight, SuperColor, and intelligent light compensation
 - ▶ Built-in dual microphones and speaker for voice intercom
 - ▶ Preset voice announcements for varied scenes and allow for custom audio file import
- Supports SuperCoding, saving 50% storage space compared with H.265.

Technical Specifications

Model HWT-C2150-10-LI-PV(3.6mm)

Major Specifications

Main control	Computing power	1TOPS				
	Memory	DDR3 0.5 GB				
	Flash type	SPI NAND FLASH 256.0 MB				
	Max capacity	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB				
Camera	Focal length	3.6mm				
	Max Aperture	F1.6				
	Image sensor	1/2.7" CMOS/5MP 2560(H)*1920(V)				
	Lens aperture type	Fixed iris				
	Angle of view	Horizontal: 78.8°; vertical: 55.9°				
	IR range	30m				
	Illumination distance	20m				
	Digital Zoom	Not Supported				
	DORI (Complied to the EN 62676-4)		D(m)	O(m)	R(m)	I(m)
		W	72.0	29.0	14.4	7.2

Intelligence

Target/Body	Target	Target detection/Target attribute recognition
	Person	Person detection
Other intelligences	Behavior analysis	Fast movement/Tripwire crossing/Intrusion/Area entry or exit /Loitering/Battery Vehicle Detection
	Crowd flow analysis	Queue length/Head counting/Crowd flow statistics
	Defocus	Supported

Open ecosystem

Data openness	Data openness	SDK (proprietary protocol)/REST API (proprietary protocol)/GA/T 1400/GB/T 28181 (2011, 2016)/ONVIF Profile S/G/T/M
---------------	---------------	--

Image

Codec	Video encoding format	MJPEG/H.264/H.265
	Video encoding channels	Triple streams
	Intelligent encoding	Extra265/264/SuperCoding
	Video frame rate	5-megapixel: 20 fps; < 5-megapixel: 30 fps or 25 fps
Image AI	Scene adaptation	Backlight adaptation/Overcast adaptation
Image ISP	Min illumination	Color: 0.005 lux (F1.2, AGC ON, 1/30s shutter speed); B/W: 0.0025 lux (F1.2, AGC ON, 1/30s shutter speed) or 0 lux (infrared illuminator enabled)
	Day/Night mode	Supported; automatic (ICR), color, B/W, or scheduled (default: automatic) Sensitivity level: high (default), medium, and low Image triggering/Internal triggering
	WDR	120 dB
	White balance	Auto/Manual/OnePush

HLC/BLC	Supported/Supported
Digital noise reduction	2D/3D noise reduction
Signal-to-Noise Ratio(SNR)	Signal-to-Noise Ratio >45 dB
Shutter speed	Supports slow shutter. Slow shutter speed levels: 1/3, 1/4, 1/8, 1/12, 1/15 Non-slow shutter speed levels: 1/25, 1/30, 1/50, 1/60, 1/90, 1/100, 1/120, 1/125, 1/180, 1/250, 1/350, 1/500, 1/725, 1/1000, 1/1500, 1/2000, 1/3000, 1/4000, 1/6000, 1/10000, 1/30000, 1/100000, custom Default: 1/25
Primary stream resolution	2560×1920(5MP),2560×1440(4MP),2048×1536(3MP),1920×1080(1080 P),1280×720(720P)
Secondary stream resolution	Secondary stream 1: 720 x 576 (PAL), 720 x 480 (NTSC), 352 x 288 (PAL), 352 x 240 (NTSC) Secondary stream 2: 352 x 288 (PAL), 352 x 240 (NTSC)
Video bit rate	Only for H.264 and H.265: 1080P~4K 512Kbps ~ 16Mbps 720P 384Kbps ~ 8Mbps D1 256K ~ 4Mbps CIF 32K ~ 1Mbps
Smart Illumination	Not Supported
Optical Defogging/Algorithm-assisted Defogging	Not Supported/Supported
EIS	The function is not supported. Sensitivity levels are not supported.

Audio


Audio	Audio Encoding Format	G.711a/G.711u/G.726/OPUS
	Audio sampling rate	G.711a/G.711u/G.726: 8 kHz OPUS: 8/12/16/24/48 kHz
	Audio bit rate	G.711a/G.711u: 64 kbit/s G.726: configurable (16/24/32/40 kbit/s) OPUS: configurable (16/24/32/40/64/96/128/160/192/224/256/288 kbit/s)

Networking

Network transmission	Protocols supported by IPv4	TCP, IPv4, UDP, DHCP, DNS, ICMP, IGMP, HTTPS, FTP, SFTP, RTP, RTSP, RTCP, SIP, ARP, SSL, NTP, SNMP (V1/V2/V3), 802.1X, QoS, SMTP, and PPPOE; Note: The northbound protocol needs to adapt to the PPPoE dialup scenario.
	Protocols supported by IPv6	HTTPS,RTP,RTCP,Onvif,RTSP,IPv6,ICMPv6,DHCPv6


Security

Data security	Media security	Supports web- or SDK-based media stream encryption; supports a maximum of two channels of encrypted media streams; media stream encryption and full intelligence, target recognition, or image upload through SFTP/FTP cannot be enabled at the same time; after the intelligent analysis function is enabled, only one-channel stream encryption is supported; supports encrypted data storage on SD cards.
	Video digital watermark	Supported
Service security	User rights	Three user roles: administrator, advanced operator, and common operator
	Security mode	User name and password authentication, 802.1X authentication, and HTTPS digital certificate
	Secure boot	Supported


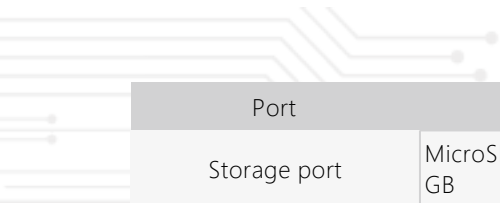


Port	
Storage port	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB
Alarm port	2 input ports and 1 output port
Network port	One RJ45 10M/100M adaptive Ethernet port
Audio port	Supported (2-channel built-in MIC)/Supported (one-channel speaker)

General Specifications	
Power type	12 V DC and PoE (IEEE 802.3af)
Power consumption	Maximum: 7.8 W; typical: 3.3 W
Operating temperature	−30°C to +60°C
Operating humidity	5% to 95% (non-condensing)
Surge protection	4 kV
IP rating	IP67
Equipment Anti Corrosion	Class C corrosion resistance
Weight	Net weight 0.6 kg;Gross weight 0.86 kg
Dimensions	Device dimensions 88 mm x 107 mm x 206 mm;Package dimensions 115 mm x 140 mm x 297 mm



Dimensions

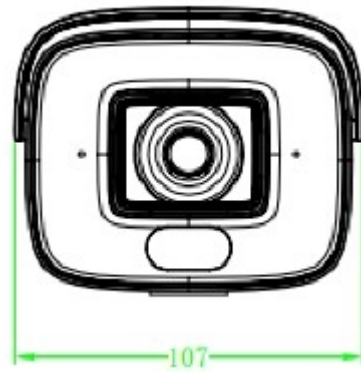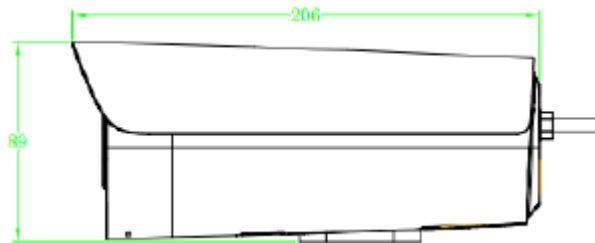

Recommended Accessories



ACC3217



ACC3285



ACC3233

HOLLOWITS Contact

Address : 6 Temasek Boulevard, 29th Floor, Suntec Tower Four, Singapore 038986

Web : www.hollowits.com

Copyright 2022. All rights reserved © HOLLOWITS TECHNOLOGIES PTE. LTD.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of HOLLOWITS TECHNOLOGIES PTE. LTD.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purposes only and constitutes neither an offer nor an acceptance. HOLLOWITS may change the information at any time without notice.



Product selector

Scan the QR code on the right to view and compare specifications of HOLLOWITS products and select the best camera for you.